



Optimist - How to install sail numbers on your sail

Do it the right way!

Put the sail numbers the right way into your new North Optimist sail - and you won't get in conflict with the class rules. Follow this guide and you are on the safe track.

Cutting the numbers:

1. Cut the numbers so they fit the designs shown on the opposite side
2. The distance between each cut and corner must be min. 30 mm and max. 40 mm. - see the drawing. Remember this rule when doing the middle cut on the number "3".

Fitting the numbers to the sail

1. In each sail you will find lines on which the numbers should be on "standing".
2. Begin with the country letters, starboard furthest forward, port side and the back of the sail.
3. Fit the sail number to the sail, starboard over port.

Distances

Between each number:

Min. 40mm - Max. 50 mm

Between leech and number:

Min. 50 mm

Between batten and number:


Min. 40 mm - Max. 50 mm

Between number on opposite sides of the sail:

Min. 40 mm - Max. 50 mm

Between the country letters on each side of the sail:

Min. 100 mm - Max. 150 mm

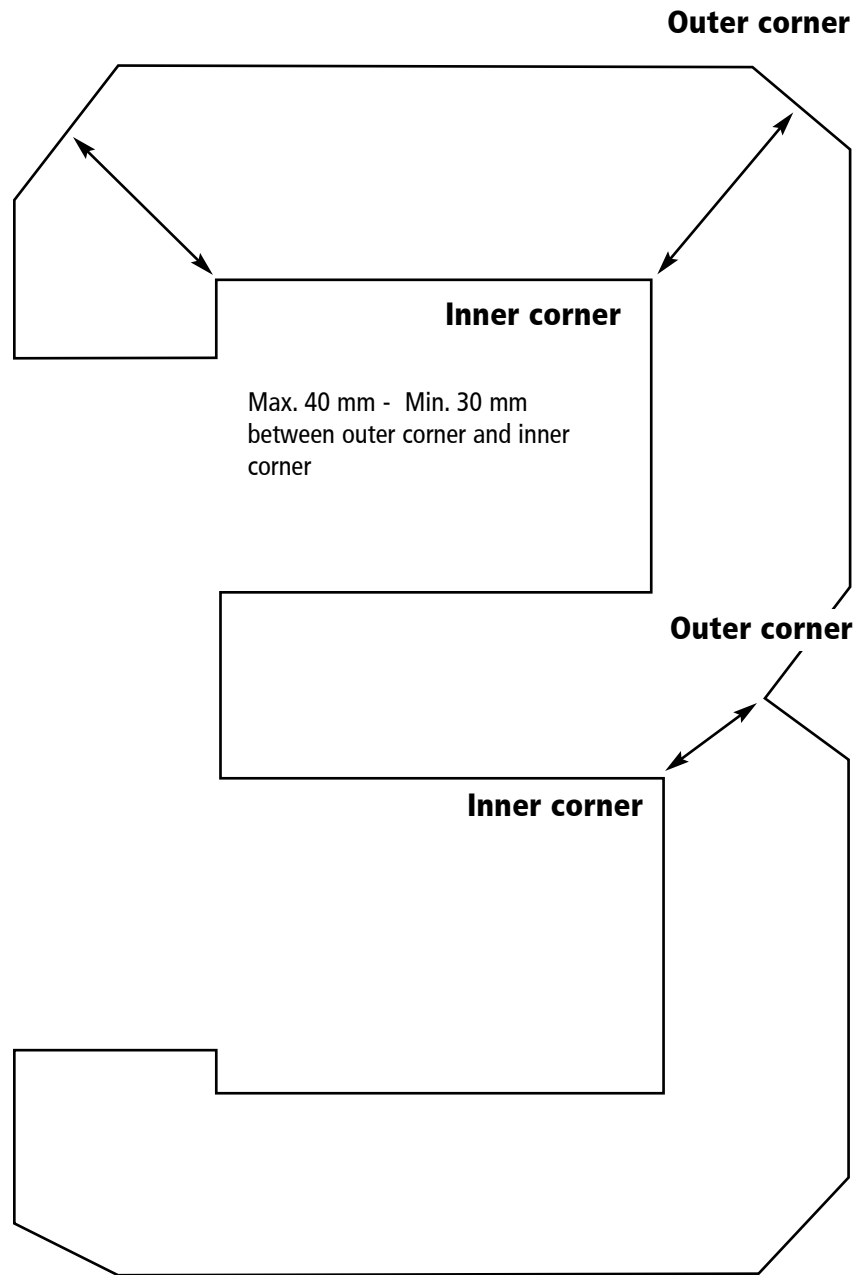

Have Fun!

ONE DESIGN WEST
(619) 226-1415 fax (619) 224-7018

ONE DESIGN CHESAPEAKE
(410) 280-3617 fax (410) 626-8445

ONE DESIGN MIDWEST
(419) 729-4777 fax (419) 726-2225


ONE DESIGN EAST
(203) 877-7627 fax (203) 877-6942

ONE DESIGN ZENDA
(262) 275-9728 fax (262) 275-8012

ONE DESIGN RHODE ISLAND
(401) 683-7997 fax (401) 683-9121



Optimist

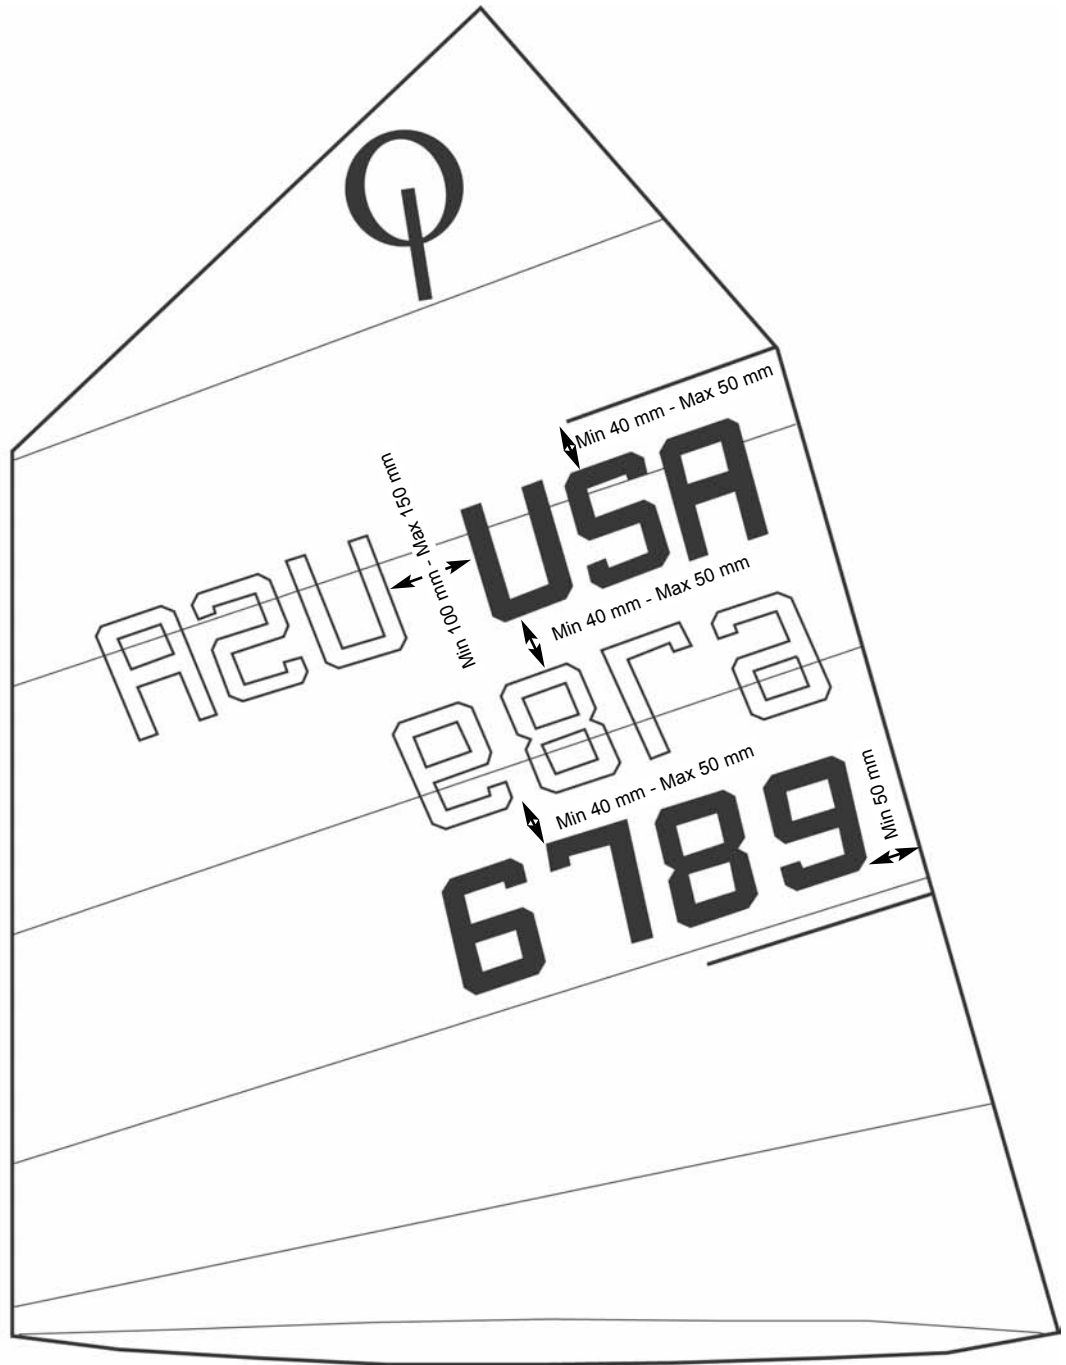

0123456789
ABCDEFGHIJK